

SCE 20

SIMAG

20 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



Internal bin capacity




6 kg of ice

300 cubes

Type of ice

Full Cubes

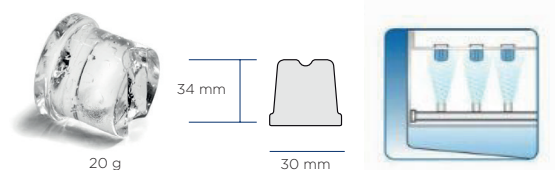

Machine dimensions

Net size WxDxH	333 x 457 x 599 mm
Net weight	28 kg
Shipping size WxDxH	400 x 530 x 690 mm
Shipping weight	33 kg

Voltage

230/50/1 Standard version

115/60/1 - 220/60/1 Available on demand

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SCE 20



20 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

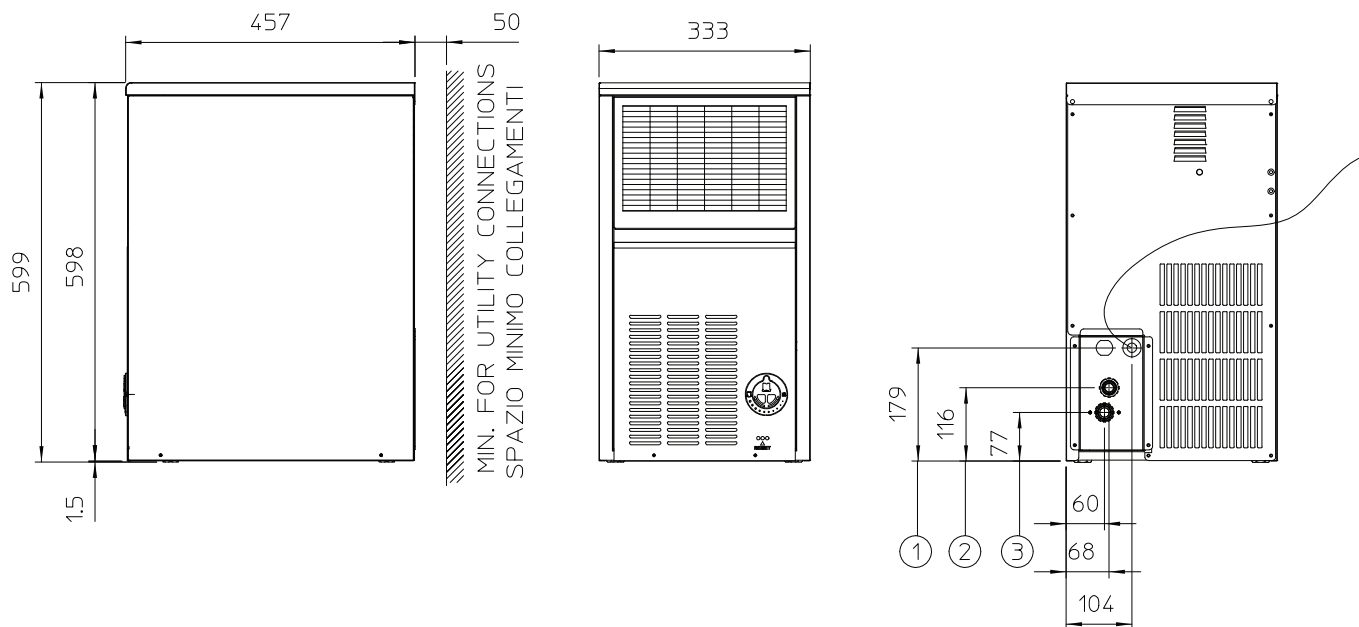

DRAINAGE PER GRAVITY

1. CORD SET
2. 3/16" WATER DRAIN
3. 3/4" GAS WATER INLET

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
				Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SCE 20 A	230/50/1	20	280	R134a	0.170	10	n.a.	7	3.0
SCE 20 W	230/50/1	20	280	R134a	0.170	10	n.a.	5	17.0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water