

# SPR 120

# SIMAG

## 120 kg Self-contained Ice Machine

Complete range: SPR 80 - SPR 120 - SPR 200

### Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production



### Internal bin capacity




55 kg of ice

### Type of ice

Flake ice



Residual water content 25 %



### Machine dimensions

Net size WxDxH	920 x 594 x 867 mm
Net weight	69 kg
Shipping size WxDxH	980 x 650 x 960 mm
Shipping weight	78 kg

### Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

### Technology and Certifications



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SPR 120



## 120 kg Self-contained Ice Machine

Complete range: SPR 80 - SPR 120 - SPR 200

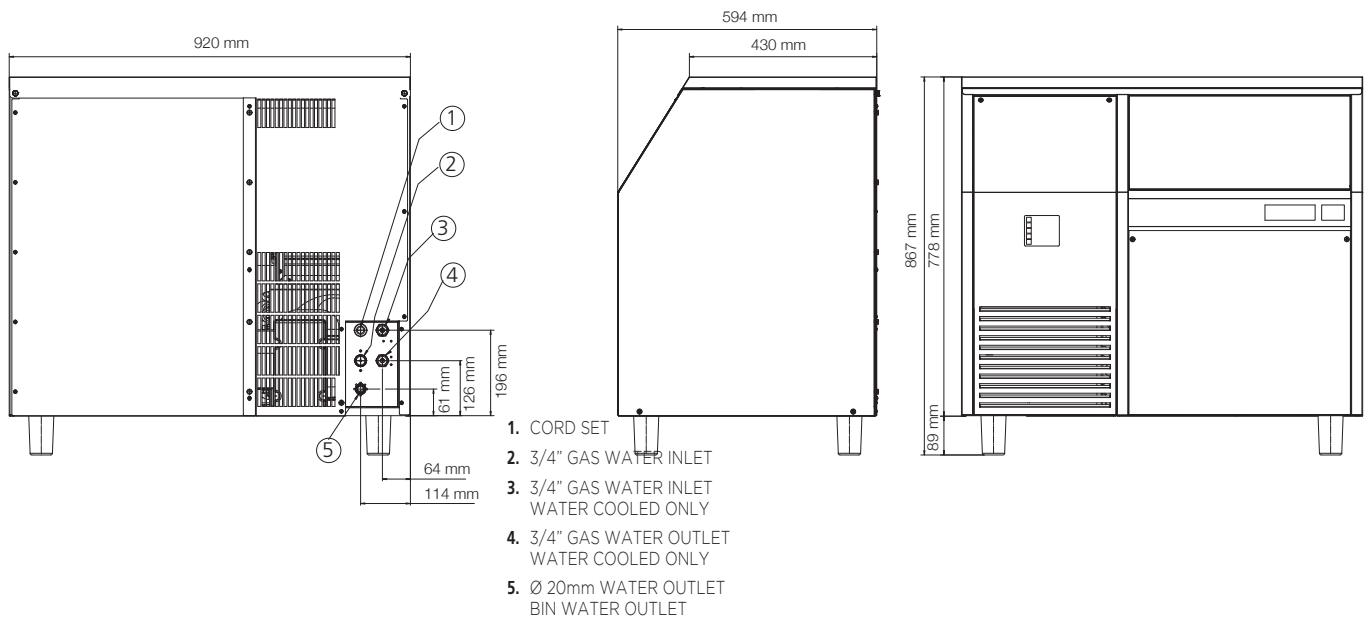

DRAINAGE PER GRAVITY

### Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
				Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SPR 120 A	230/50/1	120	500	R134a	0.440	10	n.a.	n.a.	4.2
SPR 120 W	230/50/1	120	500	R134a	0.380	10	n.a.	n.a.	29.0
SPR 120 A	220/60/1	120	n.a.	R134a	n.a.	10	n.a.	n.a.	4.6
SPR 120 W	220/60/1	120	n.a.	R134a	n.a.	10	n.a.	n.a.	29.0

(\*) Power Input: at 43°C Ambient Temperature

(\*\*) Water Consumption: at 32°C Air and 21°C Water