

SMI 80

SIMAG

85 kg Self-contained Ice Machine

Complete range: SMI 80

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production



Internal bin capacity





25 kg of ice
25000 cubes

Type of ice

Mojo Ice



Residual water content 8%



Voltage

230/50/1 Standard version
220-240/60/1 Available on demand

Machine dimensions

Net size WxDxH	529 x 626 x 880 mm
Net weight	51 kg
Shipping size WxDxH	0 x 0 x 0 mm
Shipping weight	59 kg

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SMI 80



85 kg Self-contained Ice Machine

Complete range: SMI 80

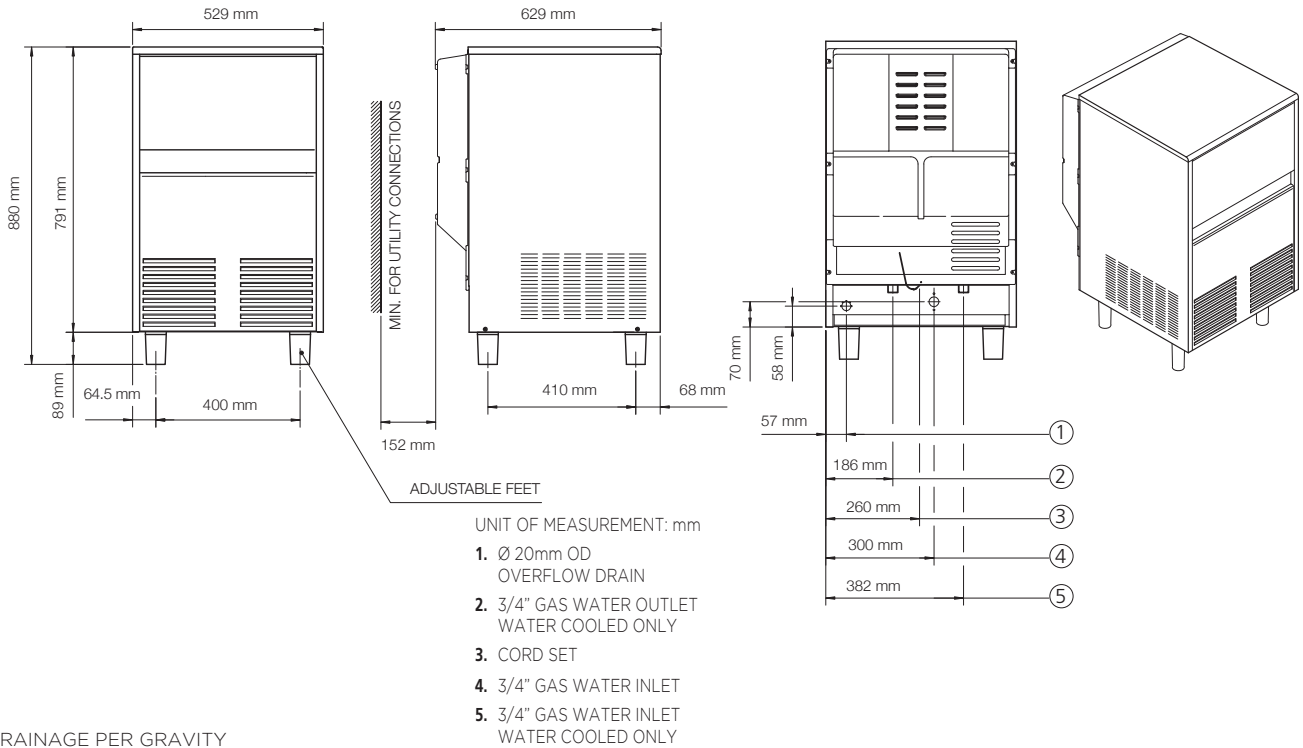

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions		
		10°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h (**)
SMI 80 A	230/50/1	85	448	R404A	0.43	10	n.a.	n.a.	2.7
SMI 80 W	230/50/1	85	350	R404A	0.42	10	n.a.	n.a.	56.0
SMI 80 A	220/60/1	85	n.a.	R134a	n.a.	10	n.a.	n.a.	n.a.
SMI 80 W	220/60/1	85	n.a.	R404A	n.a.	10	n.a.	n.a.	n.a.

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water